

## Hot Keys

Key	Description
	Toggle reading mode: R900 → Keyed → Advantage → R300
	Codes menu: trouble codes or customer notes
	Edit Mode ON
	Find (Goes to Search Mode)
	Goto
	Summary
	Keyed mode
	List mode (browse)
	Meter process menu: change meter information, found meter, skip code
	Properties
	Skip account
	Tag account
	Logout
	Tag search
	RF test
	In edit mode saves changes; exits edit mode.

## Hot Keys



Cycle through main read, route, and informational screens:

- Meter (Equinox-MR only)
- Location (Equinox-MR only)



Moves to

- Previous account (left arrow)
- Next account (right arrow)



Cancel

If in edit mode, cancel changes and exits edit mode, or returns to previous screen.



Menu



Previous unread account



Next unread account



Tab

## Technical Support

Call us with your question - normal business hours

**1-800-647-4832**

FAX your question

**1-334-283-7497**


e-mail a question

**hhsupp@neptunetg.com**

  
**NEPTUNE®**  
 PRC Equinox-MR CE5320X 05.05  
 Part No. 11769-017


  
**NEPTUNE®**  
 Equinox-MR Pocket Reference  
 for the CE5320X Handheld

## Handheld Controls

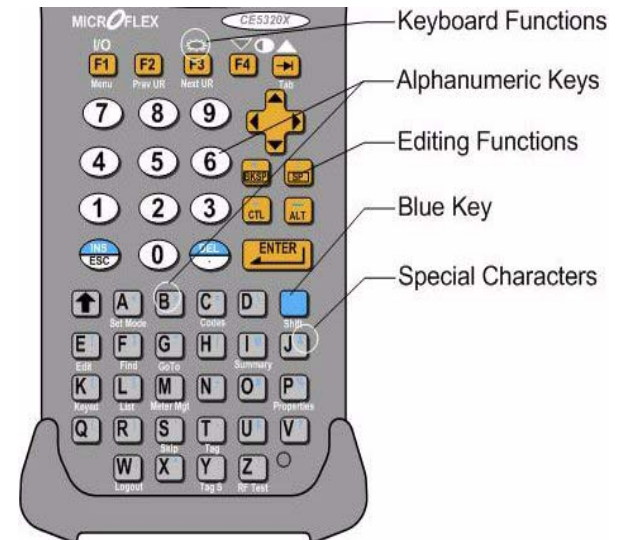

For...	Press...
ON	
OFF	,
Backlight	,

## Display Icons



	Menu
	Battery indicator
	Next unread account
	Route direction: points
	Tag account
	Customer notes
	Trouble codes
	Comment Code
	Cycles between one of these icons displays depending on the type of reading:
	<ul style="list-style-type: none"> <li>• Keyed</li> <li>• R900 (<b>Note:</b> If current account is R300, R3 displays)</li> </ul>
	<ul style="list-style-type: none"> <li>• Probe</li> </ul>
	Changes per type of account:
	<ul style="list-style-type: none"> <li>• Read parameters (manual accounts)</li> <li>• Edit (radio and probe accounts)</li> </ul>

## Using the Handheld

- Log In (Synchronize Screen)
- Log Out
- 1 and complete the required information.
  - 2

Reboot

, then , then .

If the handheld is locked, then hold down the following 3 keys at the same time until the Handheld beeps:

## Navigate

Next field

(Moves forward between fields.)

(Backward)

Scroll active accounts

**Left and Right** arrows go to the next or previous account in route.  
**Up and Down** arrows show more information screens.

Within a route

(Previous unread account)

(Next unread account)

Goto

- 1 , then select option and enter value in available field, if applicable.
- 2 Press

View route summary

List mode (Browse)

, then navigate through the list, or make a selection from the list.

## Working with Accounts

Tag/untag the current account

Find

, enter criteria, then

Switch reading mode

Key a reading (Manual reading)

then enter the reading. Press to switch to another mode.

Skip account

- 1 , then select a reason code.
- 2 Type any comments, if applicable.
- 3 to accept or to cancel.

Add trouble codes

- 1 , , then select code.
- 2 Press

Add customer notes

- 1 , , then type note.
- 2 Press

Found meter

- 1 , then .
- 2 Type the information; add any notes.
- 3 to accept or to cancel.

Change meter

- 1 , then .
- 2 Enter the new information and any notes.
- 3 to accept or to cancel.

Change handheld properties

then select the fields you want to change, and click

Resequence

- 1 , ,
- 2 Enter resequencing information and press to accept or to cancel.

Reset order (delete a reading)

, ,